



L958H

SDLG Wheel Loader
18.45 t (40,675 lbs) | 168 kW (228 hp)

● Highlights

- The L958H is equipped with a Perkins engine providing ample power for all applications.
- VRTE205 automatic transmission, KD function, power cut-off function, gears front four and rear four, easy to control, reliable and durable.
- Hydraulic-driven reversible cooling fan optimizes cooling and engine efficiency by varying the fan speed to maintain the appropriate water and oil temperatures.
- Cab is equipped with optimized air conditioning and air suspension seat with heating.
- ROPS&FOPS certified cab with expanded glass viewing area, rear-view camera, and four LED working lights.
- All pertinent information is monitored by the conveniently located screen within the operator's field of vision.
- Engine and daily maintenance points are easily accessible through the wide-opening rear hood.




Reliability In Action

L958H

Specifications

Standard bucket capacity	m ³ (yd ³)	3.2 (4.2)
Rated load	kg (lbs)	5,500 (12,125)
Operating weight	kg (lbs)	18,450 (40, 675)
Engine model	-	Perkins 1206J-E70TTA
Rated power	kW (hp)	168 (228)
Rated engine speed	rpm	2,200
Engine displacement	ml (in ³)	7010 (428)
Speed at F1/R1	km/h (mph)	0 ~ 7 (0~4.4)
Speed at F2/R2	km/h (mph)	0 ~ 12.5 (0~7.8)
Speed at F3/R3	km/h (mph)	0 ~ 27 (0~16.8)
Speed at F4/R4	km/h (mph)	0 ~ 39 (0~24.2)
Breakout force	kN (lbf)	175 (39,342)
Tire size	-	23.5-25
Fuel tank	L (gal)	300 (79.3)

Dimensions

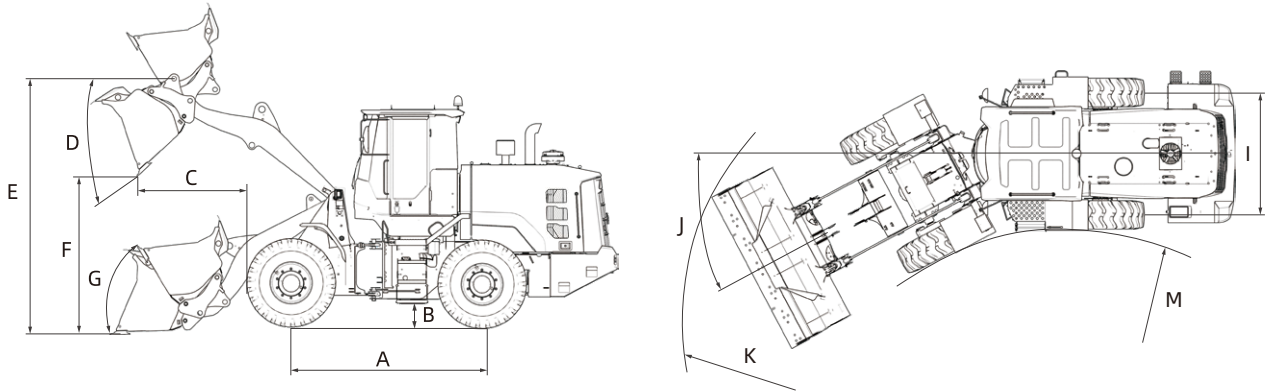

Overall shipping size (L * W * H)	mm(ft in)	8,300 (27' 2.8") * 3,016 (9' 10.7") * 3,450 (11' 3.8")
A Wheelbase	mm(ft in)	3,400 (11'1.9")
B Ground clearance	mm(ft in)	420 (1'4.5")
C Reach at max. height	mm(ft in)	1,150 (3'9.3")
D Dumping angle	°	45
E Height at bucket pin	mm(ft in)	4,205 (13'9.6")
F Dumping height	mm(ft in)	3,150 (10'4")
G Bucket rollback at ground level	°	42
I Wheel tread	mm(ft in)	2,190 (7'2.2")
J Articulation angle	°	38
K Turning radius at over bucket	mm(ft in)	6,980 (22'10.8")
M Turning radius at inside of tires	mm(ft in)	3,560 (11'8.2")

*SDLG reserves the right to change specifications and materials at any time without prior notification. Features of the machine in photos may include additional equipment.If you need more information and available options, please contact your local distributor or SDLG.



Congratulations SDLG for winning
EFQM Global Excellence Award,
one of the top three quality awards in the world.

Member of the VOLVO Group since 2006

SDLG is member of the Volvo Group and a leading international manufacturer of construction machinery, and the national-level high-tech company, with a wide network of dealerships and service workshops throughout the world.

SDLG Europe B.V.

Head Office: Kelvinstraat 4 Harderwijk Netherlands
Website: www.sdlg.com Email: info@sdlgeu.com