



Reliability In Action

E6135H

HYDRAULIC EXCAVATOR

Operating weight: 12800 kg

Bucket capacity: 0.55 m³

Engine power: 80 kW




**Powerful performance and
strong adaptability**

**High-end configuration
reliable and durable**

**Safe and comfortable
easy to maintain**

E6135H

Main specifications

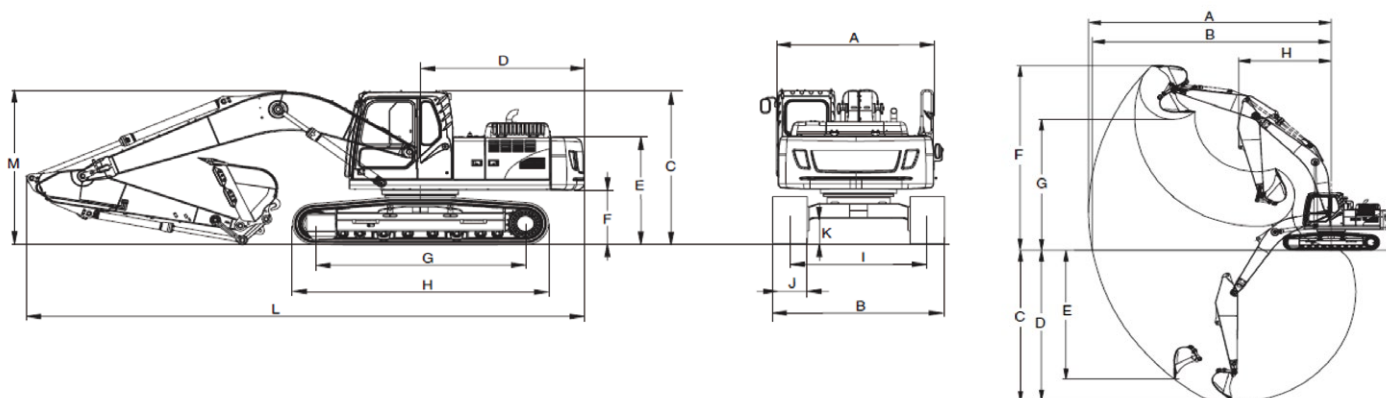

Specifications		Travelling section		G	Max. dumping height	5980		
Operating weight(kg)	12800	Number of track shoes	44	H	Min. front swing radius	2630		
Bucket capacity(m³)	0.55	Number of carrier roller (one side)	1	Overall specifications		Unit: mm		
Boom length(mm)	4600	Number of supporting wheel (one side)	7	A	Overall width of upper assembly	2490		
Arm length(mm)	2500	Track shoe width (mm)	500	B	Overall width	2490		
Engine		Service capacity		C	Overall height of cab	2810		
Engine Model	BF4M2012-11T2	Fuel tank(L)	290	D	Tail swing radius	2250		
Engine Type	Four-stroke, supercharged, intercooled	Hydraulic oil tank(L)	100	E	Overall height of engine hood	2449		
Emission	GB 20891-2007(stage II)	Engine oil(L)	13	F	Counterweight clearance	900		
Engine power(kW)	80	Hydraulic system(L)	175	G	Wheel base	2870		
Rated engine speed(r/min)	2000	Cooling system(L)	20	H	Track length	3610		
Maximum torque (N.m)/rotation speed (r/min)	450/1500	Overall range		Unit: mm		I	Track gauge	1990
Displacement(ml)	4040	A	Max. digging reach	8330	J	Track width	500	
Main performance		B	Max. digging reach on ground	8190	K	Min. ground clearance	430	
Traveling speed (low/high) (km/h)	3.0/5.1	C	Max. digging depth	5530	L	Overall length	7750	
Slewing speed (r/min)	10.3	D	Max. digging depth (horizontal 2.44 m)	5310	M	Overall height of boom	2830	
Average ground pressure (kPa)	40.9	E	Max. vertical wall digging depth	5060				
Bucket Digging Force (ISO) (kN)	79.5	F	Max. cutting height	8420				

*SDLG reserves the right to change specifications and materials at any time without prior notification. Features of the machine in photos may include additional equipment. If you need more information and available options, please contact your local distributor or SDLG.



Shandong Lingong Construction Machinery Co., Ltd.

Add: Lingong Industry Park, Economic Development Zone, Linyi, Shandong, P. R. China

Tel: + 86-531-66590505 Fax: + 86-531-66590505 E-mail: export@sdlg.com Website: www.sdlg.com