



Reliability In Action

E6375H

HYDRAULIC EXCAVATOR

Operating weight: 39500 kg

Bucket capacity: 2.3 m³

Engine power: 272 kW



High Efficiency & Energy Saving

Reliable & Durable



Comfortable & Convenient

E6375H

Main Specifications

Specifications	
Operating weight(kg)	39500
Bucket capacity(m ³)	2.3
Boom length(mm)	6450
Arm length(mm)	2950
Service capacity	
Fuel tank(L)	725
Hydraulic oil tank(L)	HVE46/195
Engine oil(L)	CI-4/35
Hydraulic system(L)	HVE46/455
Cooling system(L)	45
Travelling section	
Number of track shoes	50
Number of carrier roller (one side)	2
Number of supporting wheel (one side)	9
Track shoe width (mm)	600

Engine	
Engine Model	QSL8.9-C370-30
Engine Type	In-Line, Six-Cylinder, Turbocharged, intercooled
Emission	PROCONVE MAR-1
Engine power(kW)	272
Rated engine speed(r/min)	1900
Maximum torque (N.m)/rotation speed (r/min)	1525/1150
Displacement(ml)	8880
Main performance	
Traveling speed (low/high) (km/h)	3.6/5.3
Slewing speed (r/min)	9.4
Average ground pressure (kPa)	70.6
Bucket Digging Force (ISO) (kN)	241
Arm Digging Force - ISO	210.4

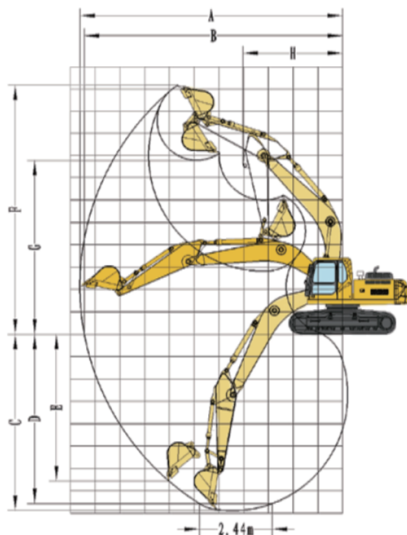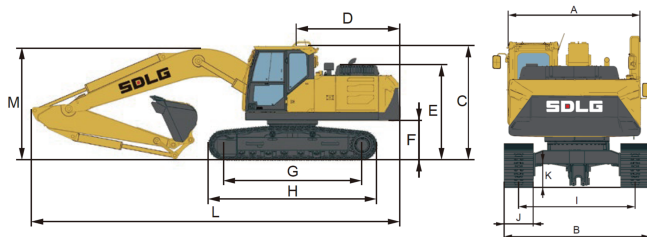

Overall specifications		Unit: mm
A	Overall width of upper assembly	3327
B	Overall width	3540
C	Overall height of cab	-
D	Tail swing radius	3654
E	Overall height of engine hood	-
F	Counterweight clearance	1210
G	Wheel base	4240
H	Track length	5180
I	Track gauge	2740
J	Track width	600
K	Min. ground clearance	556
L	Overall length	11370
M	Overall height of boom	-

Overall range		Unit: mm
A	Max. digging reach	11010
B	Max. digging reach on ground	10800
C	Max. digging depth	7270
D	Max. digging depth (horizontal 2.44 m)	7100
E	Max. vertical wall digging depth	5670
F	Max. cutting height	10220
G	Max. dumping height	7170
H	Min. front swing radius	4400



Shandong Lingong Construction Machinery Co., Ltd.

Add: Lingong Industry Park, Economic Development Zone, Linyi, Shandong, P.R.China

Tel: 0086-531-66590505 Fax: 0086-531-66590505 E-mail: export@sdlg.com Website: www.sdlg.com