



Reliability In Action

E6135H

HYDRAULIC EXCAVATOR

Operating weight: 12800 kg

Bucket capacity: 0.6 m³

Engine power: 75 kW



High Efficiency & Energy Saving

Reliable & Durable



Comfortable & Convenient

E6135H

Main Specifications

Specifications	
Operating weight(kg)	12800
Bucket capacity(m ³)	0.6
Boom length(mm)	4600
Arm length(mm)	2500
Service capacity	
Fuel tank(L)	290
Hydraulic oil tank(L)	100
Engine oil(L)	13
Hydraulic system(L)	175
Cooling system(L)	20
Travelling section	
Number of track shoes	44
Number of carrier roller (one side)	1
Number of supporting wheel (one side)	7
Track shoe width (mm)	500

Engine	
Engine Model	BF4M2012-10T3R
Engine Type	Four-stroke, turbocharged, watercooled
Emission	PROCONVE MAR-1
Engine power(kW)	75
Rated engine speed(r/min)	2000
Maximum torque (N.m)/rotation speed (r/min)	425/1500
Displacement(ml)	4040
Main performance	
Traveling speed (low/high) (km/h)	3.0/5.1
Slewing speed (r/min)	10.3
Average ground pressure (kPa)	40.1
Bucket Digging Force (ISO) (kN)	87.3
Arm Digging Force - ISO	60.9

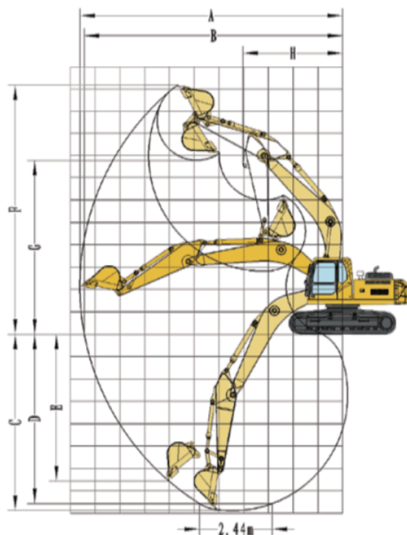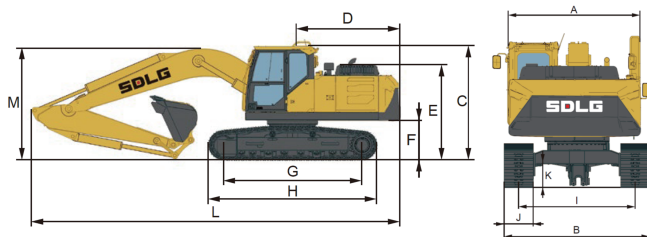

Overall specifications		Unit: mm
A	Overall width of upper assembly	2490
B	Overall width	2490
C	Overall height of cab	-
D	Tail swing radius	2250
E	Overall height of engine hood	-
F	Counterweight clearance	900
G	Wheel base	2870
H	Track length	3610
I	Track gauge	1990
J	Track width	500
K	Min. ground clearance	430
L	Overall length	7750
M	Overall height of boom	-

Overall range		Unit: mm
A	Max. digging reach	8460
B	Max. digging reach on ground	8330
C	Max. digging depth	5580
D	Max. digging depth (horizontal 2.44 m)	5360
E	Max. vertical wall digging depth	4940
F	Max. cutting height	8680
G	Max. dumping height	6180
H	Min. front swing radius	2680



Shandong Lingong Construction Machinery Co., Ltd.

Add: Lingong Industry Park, Economic Development Zone, Linyi, Shandong, P.R.China

Tel: 0086-531-66590505 Fax: 0086-531-66590505 E-mail: export@sdlg.com Website: www.sdlg.com