



Reliability In Action

E660H

HYDRAULIC EXCAVATOR

Operating weight: 6050 kg

Bucket capacity: 0.23 m³

Engine power: 36.2 kW




High-efficiency & energy saving

Reliable & durable

Comfortable & convenient

Main specifications

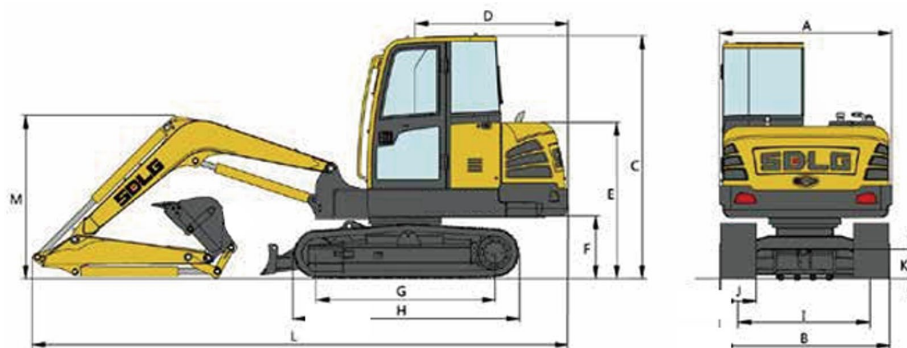

Overall specifications		Unit: mm	Service capacity		Overall range		Unit: mm
A Overall width of upper assembly	1870		Fuel tank (L)	135	A Max. digging reach	6125	
B Overall width	1940		Hydraulic oil tank (L)	50	B Max. digging reach on ground	5975	
C Overall height of cab	-		Engine oil (L)	12	C Max. digging depth	3760	
D Tail swing radius	1670		Hydraulic system (L)	100	D Max. digging depth (horizontal 2.5 m)	3325	
E Overall height of engine hood	-		Cooling system (L)	10	E Max. vertical wall digging depth	2500	
F Counterweight clearance	737				F Max. cutting height	5915	
G Wheel base	1990		Specifications		G Max. dumping height	4220	
H Track length	2540		Operating weight (kg)	6050	H Min. front swing radius	2260	
I Track gauge	1540		Bucket capacity (m³)	0.23	Engine		
J Track width	400		Boom length (mm)	3030	Engine Model	4TNV94L-ZCSCLG	
K Min. ground clearance	375		Arm length (mm)	1540	Engine Type	In-line, water-cooled, four-stroke	
L Overall length	5945		Main performance		Emission	GB 20891-2014(China IV)	
M Overall height of boom	-		Traveling speed (low/high) (km/h)	2.4/4.8	Engine power (kW)	36.2	
Travelling section			Slewing speed (r/min)	0 ~ 11.5	Rated engine speed (r/min)	2200	
Number of carrier roller (one side)	1		Average ground pressure (kPa)	34	Maximum torque (N.m)/rotation speed (r/min)	200.80/2200	
Number of supporting wheel (one side)	5		Bucket Digging Force (ISO) (kN)	45	Displacement (ml)	3054	

* SDLG reserves the right to change specifications and materials at any time without prior notification. Features of the machine in photos may include additional equipment. If you need more information and available options, please contact your local distributor or SDLG.



Shandong Lingong Construction Machinery Co., Ltd.

Add: Lingong Industry Park, Economic Development Zone, Linyi, Shandong, P.R.China

Tel: 0086-531-66590505 Fax: 0086-531-66590505 E-mail: export@sdlg.com