



| Main Parameter (Standard Equipment)

Item	Specifications	Item	Specifications
Overall parameter		Speed at FI/RII (km/h)	0~13.7
Operating weight (kg)	25500	Speed at FI/RIII (km/h)	0~27.3
Rated load (kg)	7500	Speed at FI/RIV (km/h)	0~40
LxWxH (mm)	9250x3490x3620	Hydraulic system of working device	
Bucket capacity (m³)	4.2	System pressure	25.5MPa
Max. tractive force (kN)	≥226	Total cycle time (bucket lift & dump & fall)	≤10.1s
Max. breakout force (kN)	≥230	Steering system	
Tipping load (kN)	≥161	System pressure	21MPa
Engine		Fill capacity	
Rated power/speed	199kw(270Hp) @2200r/min	Fuel (L)	380
Emission standard	GB 20891-2014 (stageIII)	Hydraulic oil (L)	230
Transmission system		Engine (L)	20
Transmission type	Axis-fixed electro-hydraulic	Transmission (L)	55
Gears	F4 & R4	Front axle (L)	61
Speed at FI/RI (km/h)	0~7.4	Rear axle (L)	54

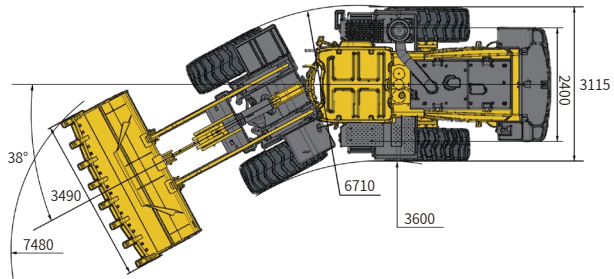

* SDLG reserves the right to change specifications and materials at any time without prior notification. Features of the machine in photos may include additional equipment. If you need more information and available options, please contact your local distributor or SDLG.

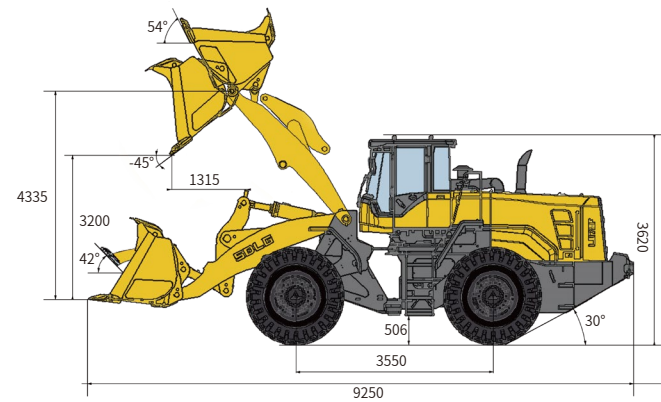

Congratulations to SDLG on winning
the EFQM Global Excellence Award
One of the world's top three quality awards



Shandong Lingong Construction Machinery Co., Ltd.

Add: Lingong Industry Park, Economic Development Zone, Linyi, Shandong, P. R. China
Tel: + 86-531-66590505 Fax: + 86-531-66590505 E-mail: export@sdlg.com Website: www.sdlg.com

L975H WHEEL LOADER

Operation Weight: 25500 kg
Bucket Capacity: 3.5~7.0 m³
Engine Power: 199 kW


Reliability in Action



L975H Wheel Loader

High Efficiency

- Weichai high efficiency engine, Tier T3.
- The energy-saving low-speed engine fits well with the high-efficiency and realizes a comprehensive energy saving of more than 10%.
- High market share and high reliability; Good adaptability; Low maintenance cost.



High Reliability

- It is applied with the VOLVO HTE220B fixed-shaft electro-hydraulic shift transmission of four forward gears and four reverse gears, which features high transmission efficiency.
- It has the function of power cut-off and neutral gear lock-up, enabling stable and impact-free gearshift and high reliability. The KD gearshift function configured reduces the operating efforts and enhances the flexibility and efficiency.



Greater Reliability

- Fully new generation of boxed frame design by VOLOVO and SDLG team.
- The load distribution is reasonable; Fatigue test for 200 k Hours, to get the greater reliability.




High Quality

- Hydraulic system components use internationally renowned suppliers; Large flow, high pressure, smooth composite action.
- Lightweight operation, high efficiency and reliable performance.




Convenience

- Automotive-grade mold-formed steel hood with high structural strength and elegant appearance.
- The double gas spring opens the hood and is easy to operate.
- Large opening side door maintenance is more convenient.




Adaptability

- Equipped the oil-bath filter to meet the abnormable environment.



Heavy-Duty

- Equipped with a wet axle, it features stable and reliable braking, large braking torque, and low thermal fade. In terms of durability and maintenance, it has strong anti - pollution ability, low wear, long service life, and simple maintenance. It can also adapt to harsh and special working conditions.



Greater Carrying Capacity

- Lift arm uses the lightweight technology, the effective load of each work cycle increased 2%, to achieve the energy saving.
- Lower resistance bucket with small resistance can shovel with hard material, increases 10% in load capacity, improves the working efficiency greatly, reduces the use cost and saves energy.



Comfortability

- The super-large, full-view, Low noise, Double curved arc front windshield, Luxury seat and User-friendly design, to build the best operating environment. Inner space increased by 15%; Width of view increased by 20%; Sealing property increased by 35%; with powerful air condition.






Safety

- Full-Hydraulic brake system, more sensitive, steady and reliable.



Standard Confugrations

Weichai WP10G270E341 engine	Work lights	F
Volvo HTE220B Auto Transmission	26.5-25-28PR-L3 (Front tire)	
SDLG Wet Axle	26.5-25-24PR-L3 (Rear tire)	
Finger tip lever	Engine fan guard	
4.2-7.0m³ Bucket	Air pre-filter	A
Standard cabin	Power switch	
Fresh air conditioning	Tool box	
Adjustable steering column	Oil bath air filter	B G
Digital combination instrument	Full hydraulic steering	C
Air control parking brake	Variable flow steering system	
Radio	Hydraulic drive cooling	
Sun visor	Box type frame	D
Clothes-hook	93 type dust-filter	
Cup holder	Large space cab	
Centralized control box	Full hydraulic service brake	E
Front & rear wiper		

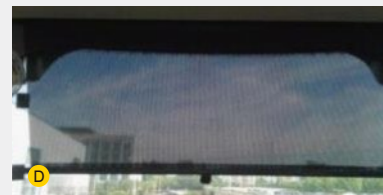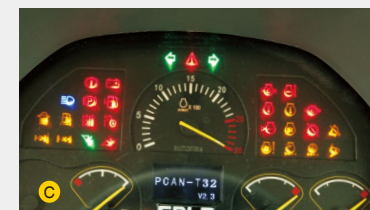

Optional Equipment

GP Bucket 4.2/4.5 m³ (W/W.O Wear plates)	Donaldson Air Filter
Enlarged Bucket 5.5/6.0/6.5/7.0 m³	Antifreeze Module For Cold Environment
Extension Boom (W/W.O Centralized Lubrication)	Seat with three-point seat belt
Tire 26.5-25-28PRTL-L-3	Rearview Mirror
Tire Protection Chain (26.5-25-L3-500KG)	Tbox
GPS (For India)	