
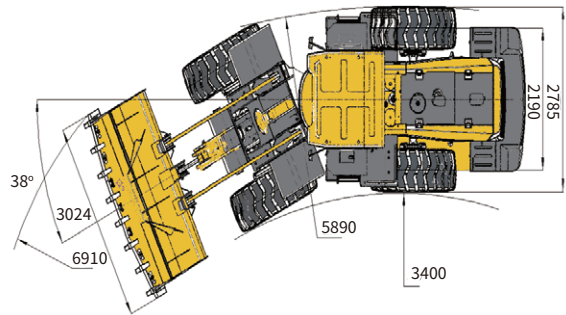


| Main Parameter (Standard Equipment)

Item	Specifications
Overall parameter	
Operating weight (kg)	17400 (STD cab) 17700 (Fops & Rops cab)
Rated load (kg)	5400
LxWxH (mm)	8320x3024x3410
Bucket capacity (m³)	3.2
Max. tractive force (kN)	≥ 160
Max. breakout force (kN)	≥ 175
Tipping load (kN)	≥ 110
Engine	
Rated power/speed	220Hp@2200r/min
Stage III	GB20891-2007 (stage II)
Transmission system	
Transmission type	Axis-fixed electro-hydraulic
Gears	F4 & R4
Speed at FI/RI (km/h)	0~6.7/6.8

Item	Specifications
Speed at FI/RII (km/h)	0~12.4/12.5
Speed at FI/II/RIII (km/h)	0~25.9/26.1
Speed at FI/IV/RIV (km/h)	0~38/38.2
Hydraulic system of working device	
System pressure	19MPa(2-spool valve) 19.5MPa(3-spool valve)
Total cycle time (bucket lift & dump & fall)	≤ 10.6s
Steering system	
System pressure	16MPa
Fill capacity	
Fuel (L)	300
Hydraulic oil (L)	240
Engine (L)	20
Transmission (L)	17.1/4.7
Drive axle (L)	2×30
Braking system (L)	4

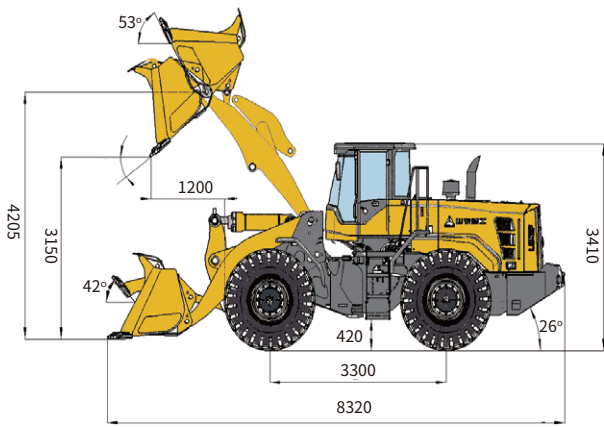

Reliability in Action

L958F WHEEL LOADER

Operation Weight: 17400~17700 kg
Bucket capacity: 3.2 m³
Engine Power: 162 kW(220HP)



Congratulations to SDLG on winning
the EFQM Global Excellence Award
One of the world's top three quality awards



Shandong Lingong Construction Machinery Co., Ltd.

Add: Lingong Industry Park, Economic Development Zone, Linyi, Shandong, P. R. China
Tel: + 86-531-66590505 Fax: + 86-531-66590505 E-mail: export@sdlg.com Website: www.sdlg.com



L958F Wheel Loader

High Efficiency

- Weichai engine.
- The energy-saving low-speed engine fits well with the high-efficiency and realizes a comprehensive energy saving of more than 10%.
- High market share and high reliability; Low maintenance cost.




High Reliability

- SDLG VRT200 fixed-shaft electro-hydraulic shift transmission.
- F4/R4, KD Gearshift function.
- High transmission efficiency, Low cost.




Heavy-Duty

- SDLG Strengthened structure Axle.
- The unique rear axle double swing arm connection makes the load distribution of the whole machine reasonable.
- Option:SDLG wet brake axle.




Comfortable

- The super-large,full-view, Low noise,Double curved arc front windshield enlarged 20% visibility, Luxury seat and User-friendly design,to build the best operating enviornment.
- Option: FOPS&ROPS Cab.




Greater Reliability

- Fully new generation of boxed frame.
- The load distribution is reasonable;Fatigue test for 200 k Hours,to get the greater reliability.




Convenience

- The engine hood adopts large upturning gate design in large opening angle,wide open compartments makes service more convenient for the daily maintenances.




Standard Confugurations

WEICHAi Engine	Headlights guard	F
SDLG transimission	Radio	
SDLG dry brake Axle	Sun visor	G
Pilot control	Clothes-hook	
3.2m³ GP bucket with teeth	Cup holder	
Standard cabin	Front & rear wiper	
Fresh air conditioning	Backing-up alarm	
Adjustable steering column	23.5-25 nylon tire L-3/16PR	
Digital combination instrument	Engine fan guard	
Centralized control box	Air pre-filter	
Air control parking brake	Power switch	
Work lights	Tool box	

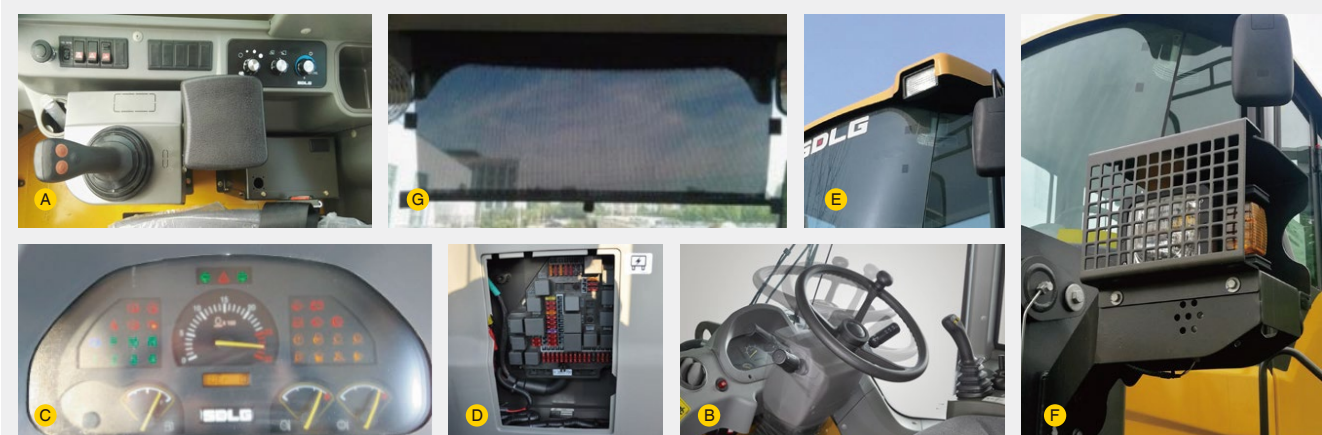

Optional Equipment

SDLG wet brake axle	Oil bath air filtration	B	3.2m³-4.5m³ light material bucket	G	LED work lights
Finger tip lever	A	Rear view camera	C	Log grapple	H
Extension arm		23.5R25 radical tire	D	Grass gripper	I
Rops/Fops cabin		Quick coupler	E	Pallet fork	J
Seat belt		2.7m³-3.2m³ rock bucket	F	Crane arm	K
					3rd function connector
					Air intake preheating
					License plate bracket

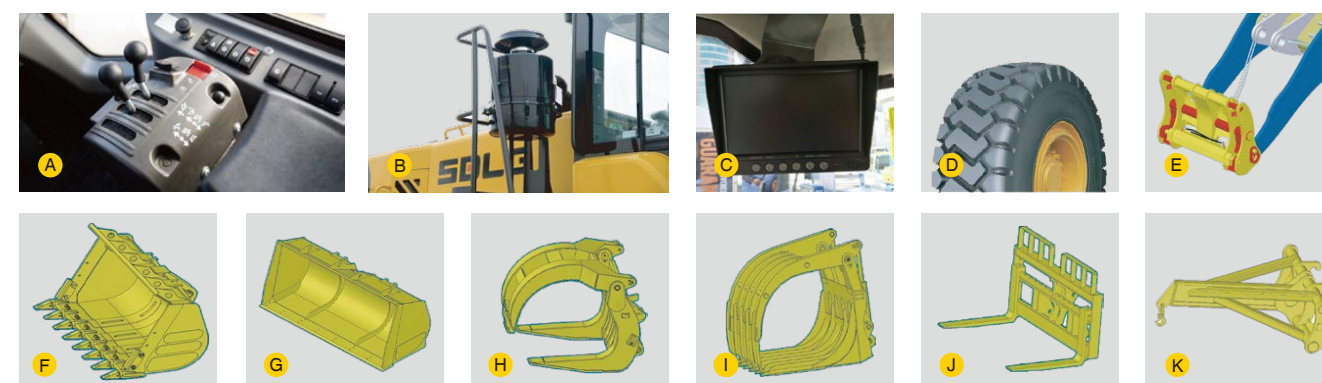

* The right of final interpretation of the abovementioned parameters shall be reserved by SDLG.
No further notice will be given in case of any change. Illustrations in the text may not always be the standard illustrations for this model.